

ET MODULE

- Positive Tolerance
- 48 Hour Response
- Local Technical Support
- Local Warehouses
- German manufacturing techniques
- Product Liability Insurance
- More than 100MW Reference
- High Quality Raw Materials
- Outstanding Performance
- Enhanced Design for Easy Installation and Long Team Reliability
- Custom Design with Wide Power Selection Down to 5W

The logo for ET Solar, featuring the letters 'ET' in a large, stylized blue font, with the word 'Solar' in a smaller, blue sans-serif font to its right.

ET Solar

ET MODULE

ET-P672280	280Wp
ET-P672275	275Wp
ET-P672270	270Wp
ET-P672265	265Wp
ET-P672260	260Wp
ET-P672255	255Wp
ET-P672250	250Wp
ET-P672245	245Wp
ET-P672240	240Wp



IEC 61215 Ed.2
IEC 61730
UL 1703



SPECIFICATIONS

Model type	ET-P672280	ET-P672275	ET-P672270	ET-P672265	ET-P672260	ET-P672255	ET-P672250	ET-P672245	ET-P672240
Peak power (Pmax)	280W	275W	270W	265W	260W	255W	250W	245W	240W
Cell type	PolyCrystalline Silicon, 156mm x 156mm								
Number of cells	72 cells in series								
Weight	23.0 kg (50.7 lbs)								
Dimensions	1956×992×50 mm (77×39.1×1.97 inch)								
Maximum power voltage (Vmp)	36.72V	36.72V	36.40V	36.40V	36.00V	35.20V	35.20V	34.95V	34.95V
Maximum power current (Imp)	7.63A	7.49A	7.42A	7.28A	7.23A	7.23A	7.12A	7.01A	6.88A
Open circuit voltage (Voc)	43.78V	43.78V	43.63V	43.63V	43.49V	43.88V	43.88V	43.85V	43.85V
Short circuit current (Isc)	7.98A	7.96A	7.90A	7.90A	7.79A	7.85A	7.81A	7.70A	7.63A
Maximum system voltage	DC 600V								
Temp. Coeff. of Isc (TK Isc)	0.065 %/°C								
Temp. Coeff. of Voc (TK Voc)	-0.346 %/°C								
Temp. Coeff. of Pmax (TK Pmax)	-0.488 %/°C								
Normal Operating Cell Temperature	45.3±2°C								



Note: the specifications are obtained under the Standard Test Conditions (STCs): 1000 W/m² solar irradiance, 1.5 Air Mass, and cell temperature of 25°C.

Please contact support@etsolar.com for technical support.

ET Module




ET-P672280 ET-P672275 ET-P672270 ET-P672265 ET-P672260
 ET-P672255 ET-P672250 ET-P672245 ET-P672240

PHYSICAL CHARACTERISTICS Unit:mm (inch)

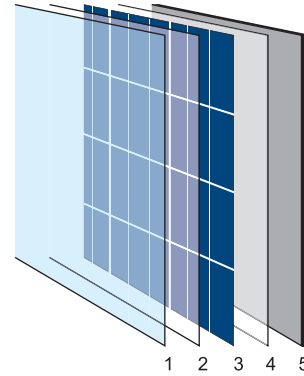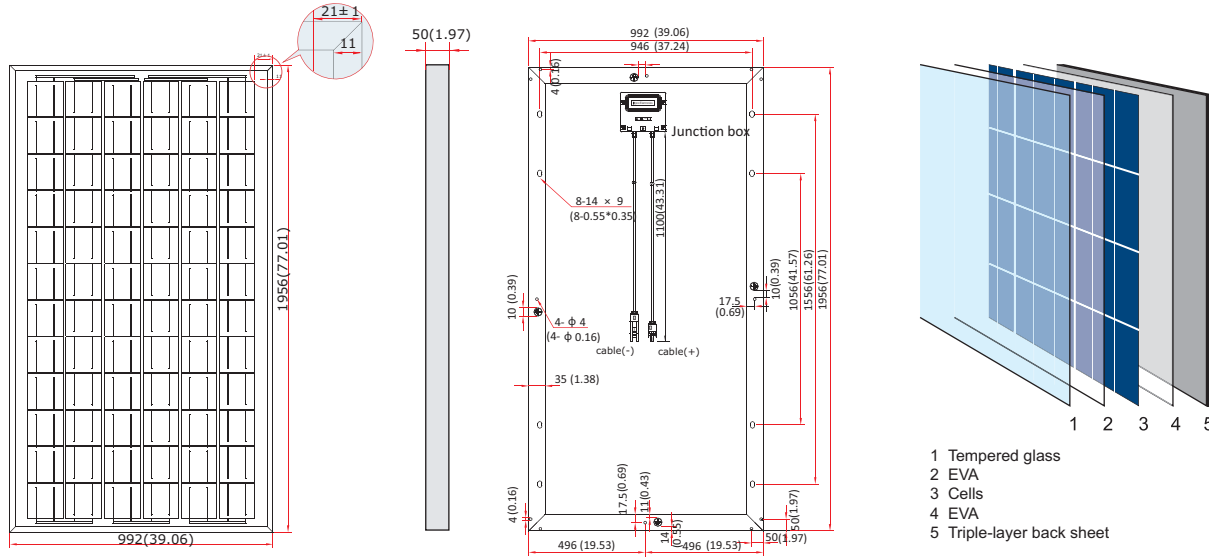

- 1 Tempered glass
- 2 EVA
- 3 Cells
- 4 EVA
- 5 Triple-layer back sheet

ELECTRICAL CHARACTERISTICS

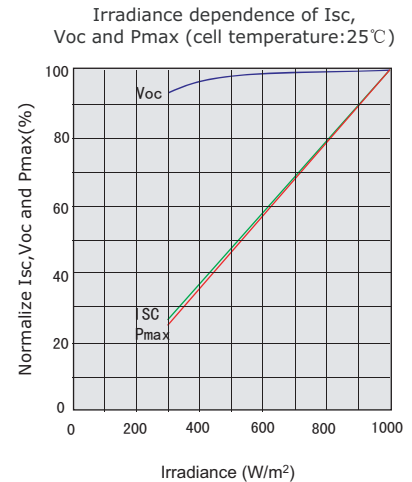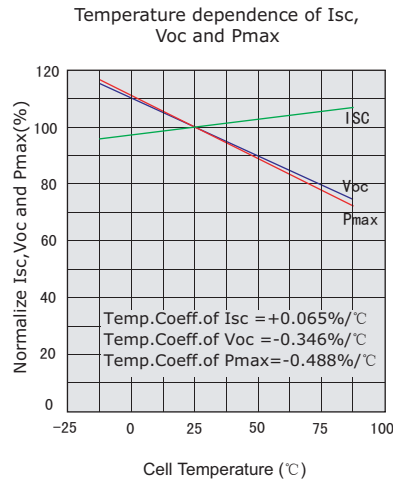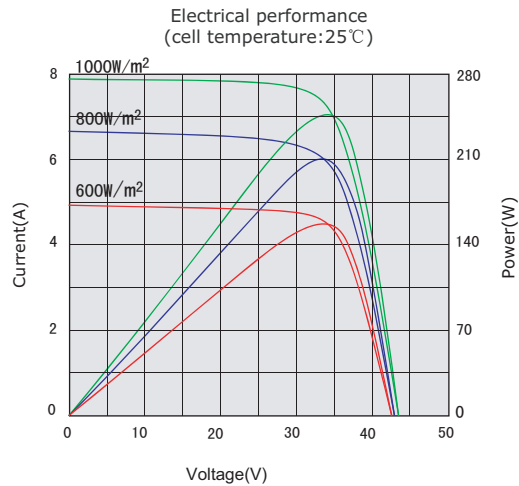



● **Headquarters (ET Solar Asia)**

Nanjing

Add: 24F, A2 World Trade Center Mansion,
67 Shanxi RD, Nanjing 210009, China

Taizhou

Add: 97 Jiangzhou South RD, Taizhou 225300, China

Tel: +86 25 8689 8098

Fax: +86 25 8689 8097

E-mail: sales@etsolar.com

● **Korea Office**

Add: B-605, Ssangyong IT tween tower, 442-5,

Sangdaewon-Dong, Seongnam City,

Kyunggi-Do, Korea

Tel: +82 31 732 4131

Fax: +82 31 732 4132

E-mail: sales@etsolar.com

● **ET Solar Europe**

Add: Im Munich City Tower,
Landsbergerstr. 110-114, D-80339,
Munich, Germany

Tel: +49 89 500 9405-0

Fax: +49 89 500 9405-99

E-mail: sales@etsolar.de

● **Italy Office**

Add: Via Boezio 6, 00193 Roma, Italy

Tel: +39 0632 803428

Fax: +39 0632 803400

E-mail: sales@etsolar.it

● **ET Solar USA**

Add: 4900 Hopyard Road, Suite 290,
Pleasanton, CA 94588, USA

Tel: +1-(925)-460-9898

Fax: +1-(925)-460-9929

E-mail: sales@etsolar.us

www.etsolar.com